




## VIGOLO – The Best Selling High Body Mulcher in Australia.

- ▶ Oversize Rotor and Driveline components
- ▶ Designed specially for harsh Australian conditions

### Product Features

A focus on structural integrity and attention to detail are the main features of the three-point headstocks of Vigolo High Body Mulchers. Our configurations are available to meet your needs: sliding headstock (standard); hydraulic side shift (optional); and fixed headstock equipped with robust lateral tie rods. Vigolo headstocks and rotors are designed to last in every work environment under strenuous continuous strains.

### High Body Mulcher – Features

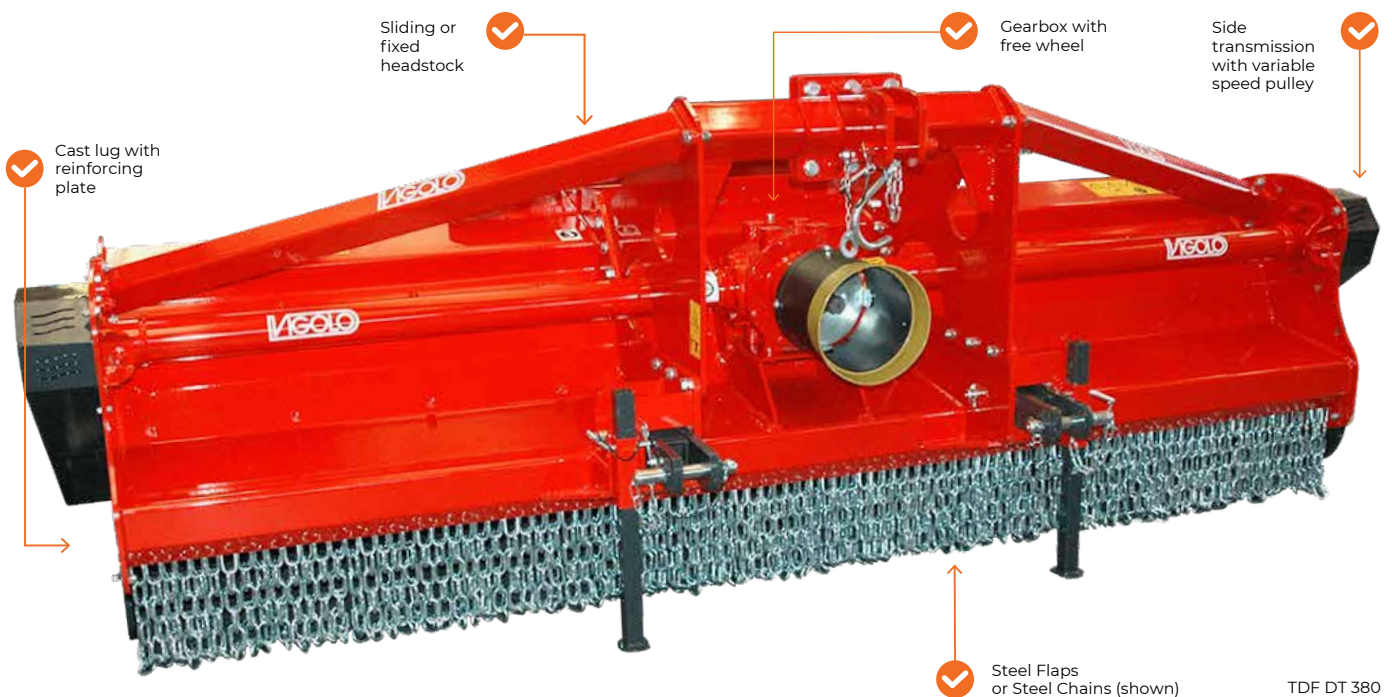

TDF DT 380

# High Body Mulchers

## TSL 160 - 250

40 - 100 HP

### Standard Equipment

- ▶ 120hp Gear Box w. Freewheel 540rpm
- ▶ 170mm Rotor w. Cast Blade Lug, "Y" Flails & Center Blade
- ▶ 194mm Rear Roller w. Height Adjustment & Scraper
- ▶ Cat. I.II 3 Point ISO Head Stock
- ▶ Mechanical Side Shift
- ▶ Opening Rear Door
- ▶ Double Skin Body
- ▶ Counter Knife Front
- ▶ Protection Plates
- ▶ PTO Shaft (1.3/8 6 spline)

### Options On Request

- ▶ Rear Wheels (in lieu of roller)
- ▶ Side Skids
- ▶ Hydraulic Side Shift
- ▶ Hydraulic Rear Door Kit



## TST 200 - 250 / TST MAX 250 - 300

50 - 180 HP

### Standard Equipment


- ▶ 120hp Gear Box w. Freewheel 540rpm
- ▶ 180hp Gear Box w. Freewheel 1000rpm (TST MAX)
- ▶ 220mm Rotor w. Cast Blade Lug, "Y" Flails & Center Blade (200.250)
- ▶ 273mm Rotor w. Cast Blade Lug, "Y" Flails & Center Blade (280.300)
- ▶ 220mm Rear Roller w. Height Adjustment & Scraper (200.250)
- ▶ 273mm Rear Roller w. Height Adjustment & Scraper (280.300)
- ▶ Cat. II 3 Point ISO Head Stock
- ▶ Mechanical Side Shift
- ▶ Opening Rear Door
- ▶ Double Skin Body
- ▶ Counter Knife
- ▶ Front Protection Chains
- ▶ PTO Shaft (1.3/8 6 spline)

### Options On Request


- ▶ Rear Wheels (in lieu of roller)
- ▶ Side Skids
- ▶ Hydraulic Side Shift
- ▶ Hydraulic Rear Door Kit




## TSL 180 - 250



## TST 200 - 250



## TST MAX 250 - 300

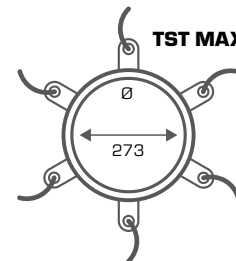

Model	Working width	Transport width	HP min - max	Kg				
TSL 160	1600	1760	40-120	520	36 + 18	± 125	4	3
TSL 180	1800	1960	40-120	540	36 + 18	± 125	4	4
TSL 200	2000	2160	40-120	580	36 + 18	± 125	4	4
TSL 220	2200	2360	50-120	660	44 + 22	± 125	4	4
TSL 250	2500	2660	60-120	750	56 + 28	± 125	4	4
TST 200	2000	2160	50-120	740	48 + 24	26	± 125	4
TST 230	2300	2460	60-180	880	56 + 28	30	± 125	5
TST 250	2500	2660	60-180	850	60 + 30	32	± 125	5
TST 250 MAX	2500	2660	60-180	1100	60 + 30	32	± 125	6
TST 280 MAX	2800	2985	70-180	1200	68 + 34	36	± 125	6
TST 300 MAX	3000	3185	80-180	1300	72 + 36	40	± 125	6



# High Body Dual Drive Mulchers



## TST-DT 250 - 320

80 - 220 HP

### Standard Equipment

- ▶ 220hp Gear Box Dual Drive w. Freewheel 1000rpm
- ▶ 273mm Rotor w. Cast Blade Lug & Protection Plates, "Y" Flails & Center Blade
- ▶ 273mm Rear Roller w. Height Adjustment & Scraper
- ▶ Cat. II 3 Point ISO
- ▶ Fixed Center Mount Head Stock
- ▶ Side Skids
- ▶ Opening Rear Door
- ▶ Double Skin Body
- ▶ Counter Knife
- ▶ Front Protection Chains
- ▶ PTO Shaft (1.3/8 6 spline)

### Options On Request

- ▶ Rear Wheels (in lieu of roller)
- ▶ Hydraulic Rear Door



Cast Lug with reinforcing plate



## TDF DT 380

170 - 270 HP

### Standard Equipment


- ▶ 270hp Gear Box, Dual Drive w. Freewheel 1000rpm
- ▶ 323mm Rotor w. Cast Blade Lug & Protection Plates, "Y" Flails & Center Blade (380)
- ▶ 273mm Rear Roller w. Height Adjustment & Scraper
- ▶ Cat. II 3 Point ISO
- ▶ Fixed Center Mount Head Stock
- ▶ Side Skids
- ▶ Opening Rear Door
- ▶ Double Skin Body
- ▶ Counter Knife
- ▶ Front Protection Chains
- ▶ PTO Shaft (1.3/8 6 spline)

### Options On Request

- ▶ Rear Wheels (in lieu of roller)
- ▶ Hydraulic Rear Door



## TST-DT 250 - 320

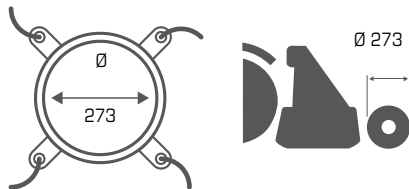

## TDF DT 380



Model	Working width	Transport width	HP min - max	Kg			
TST 250 DT	2500	2780	60-220	1300	60 + 30	32	4 + 4
TST 280 DT	2800	3080	70-220	1450	68 + 34	36	4 + 4
TST 300 DT	3000	3280	80-220	1550	72 + 36	40	4 + 4
TST 320 DT	3200	3480	80-220	1650	80 + 40	44	4 + 4
TDF 380 DT	3800	4130	170-270	2430	100 + 50	50	6 + 6

# Folding High Body Mulchers

## TSL V 400

80 - 180 HP

### Standard Equipment

- ▶ 180hp Gear Box w. Freewheel 1000rpm
- ▶ 170mm Rotor w. Cast Blade Lug, "Y" Flails & Center Blade
- ▶ 194mm Rear Roller w. Height Adjustment & Scraper
- ▶ Cat. II,III 3 Point ISO Head Stock
- ▶ Hydraulic Fold w. Transport Locks
- ▶ Opening Rear Door
- ▶ Double Skin Body
- ▶ Counter Knife
- ▶ Front Protection Plates
- ▶ PTO Shaft (1.3/8 6 spline)

### Options On Request

- ▶ Rear Wheels (in lieu of roller)
- ▶ Side Skids
- ▶ Hydraulic Berm Rake of roller
- ▶ Hydraulic Rear Door Kit



## TST V 460 - 600

170 - 270 HP

### Standard Equipment

- ▶ 280hp Gear Box w. Freewheel 1000rpm (400.500)
- ▶ 320hp Gear Box w. Freewheel 1000rpm (600.640)
- ▶ 220mm Rotor w. Cast Blade Lug, "Y" Flails & Center Blade (400.500)
- ▶ 273mm Rotor w. Cast Blade Lug, "Y" Flails & Center Blade (600.640)
- ▶ 220mm Rear Roller w. Height Adjustment & Scraper (400.500)
- ▶ 273mm Rear Roller w. Height Adjustment & Scraper (600.640)
- ▶ Cat. II,III 3 Point ISO Head Stock
- ▶ Hydraulic Fold Headstock w. Transport Locks
- ▶ Opening Rear Door
- ▶ Double Skin Body
- ▶ Counter Knife
- ▶ Front Protection Plates (400.500)
- ▶ Front Protection Chains (600.640)
- ▶ PTO Shaft (1.3/8 6 spline)

### Options On Request


- ▶ Rear Wheels (in lieu of roller)
- ▶ Side Skids
- ▶ Hydraulic Berm Rake of roller
- ▶ Hydraulic Rear Door Kit




Cast Blade Lug




## TSL-V 320 - 460










## TST-V 400



## TST-V 600



Model	 Working width	 Transport width	 HP min - max	 Kg			
TSL-V 400	4000	4300	100-180	1900	80	48	4 + 4
TST-V 460	4600	4900	140-280	2400	112	60	5 + 5
TST-V 600	6000	6320	180-320	2900	144	80	6 + 6